
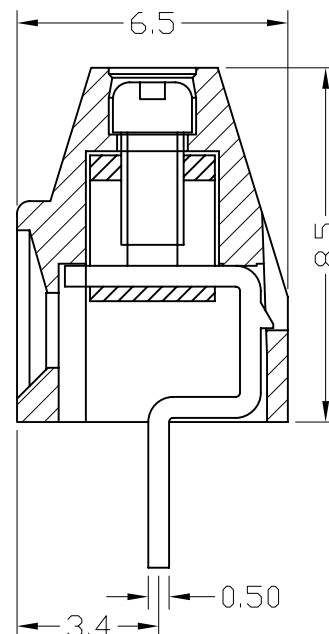


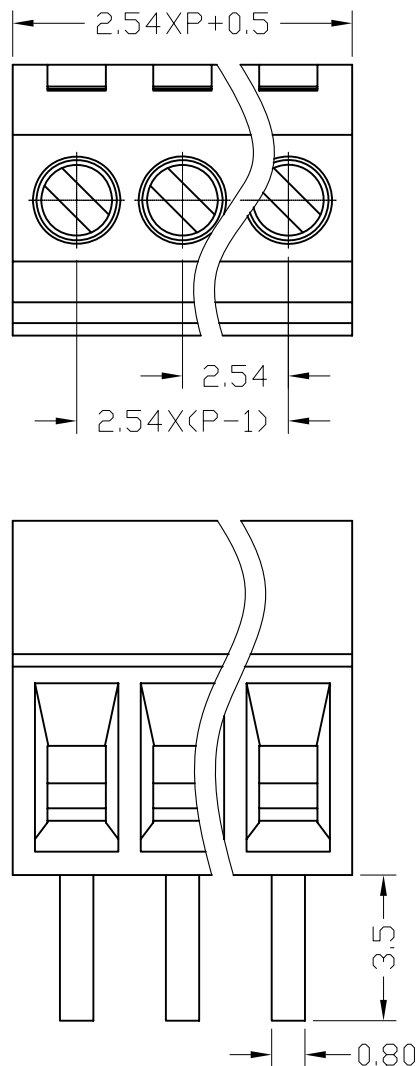

150V 6A 26-18AWG 1.0mm²
Poles: 2P&3P-12P
Pitch: 2.54mm(.100")

Materials

Housing: PA66 (UL 94V-0)

Solder Pin: Brass, Tin Plated

Wire Cage: Brass, Nickel Plated

Screw: M1.6, Steel (A3), Zinc Plated

Torque: 0.1N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by		未注公差 General Tolerance	
					x. ±0.2	x. ° ±2°
新莱亚电子 XINLAIYA ELECTRONIC CO., LTD		图名/Title	文件编号/File No.		. x ±0.1	. x ° ±1°
		XY308-2.54 产品图	QJ/XYT-2251100		. xx ±0.05	. xx ° ±0.5°
			页序/Sheet		. xxx ±0.01	
			备注 /Remark			
						单位/Units: mm