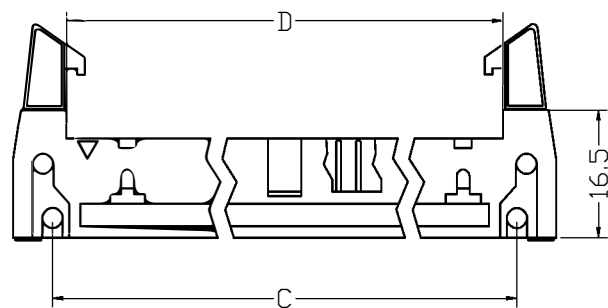


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance:1000MΩ min.at DC 500V

Current Rating:1AMP


Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55°C--+105°C

Contact:Brass

Housing:PBT &30% Glass Fiber(UL 94V-0)

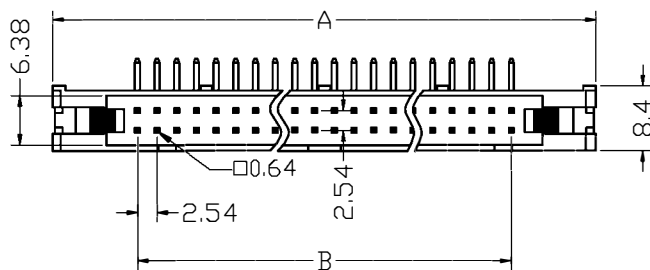

Position	A	B	C	D
10	32.00	10.16	21.84	17.96
12	34.54	12.70	24.38	20.50
14	37.08	15.24	26.92	23.04
16	39.62	17.78	29.46	25.58
20	44.70	22.86	34.54	30.66
26	52.32	30.48	42.16	38.28
30	57.40	35.56	47.24	43.36
34	62.48	40.64	52.32	48.44
40	70.10	48.26	59.94	56.60
50	82.80	60.96	72.64	68.76
60	95.50	73.66	85.34	81.46
64	100.58	78.74	90.42	86.54

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x." ±2°
				.x ±0.1	.x" ±1°
				.xx ±0.05	.xx" ±0.5°
				.xxx ±0.01	
图名/Title PSLxx				文件编号/File No.	
备注/Remark				页序/Sheet	
				单位/Units:	mm

序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date
------------	--------------------	--------------	---------