


Data Sheet | Item Number: 2587-2146

Switched-mode power supply; Base; 1-phase; 24 VDC output voltage; 10 A output current; DC-OK LED

<https://www.wago.com/2587-2146>

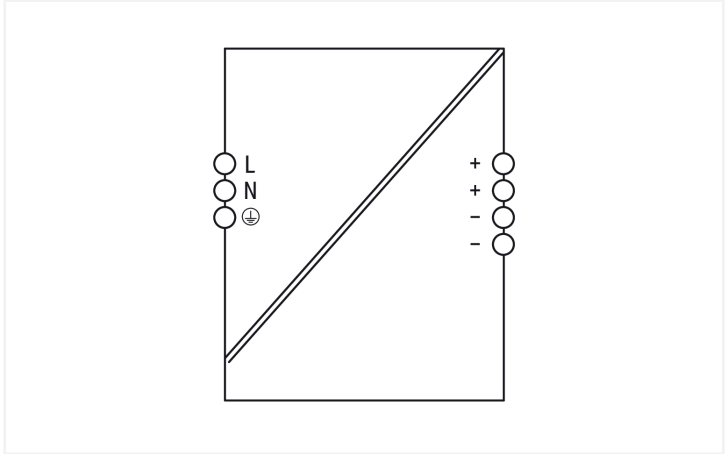

Similar to illustration

Features:

- Optical status indication
- Suitable for both parallel and series operation
- Natural convection cooling when horizontally mounted
- Connection technology with push-in termination
- Electrically isolated output voltage (SELV) per EN 62368-1/UL 61010-1

Technical data			
Input		Output	
Phases	1	Nominal output voltage $U_{o\,nom}$	24 VDC (SELV)
Nominal input voltage $U_{i\,nom}$	1 x 100 ... 240 VAC	Output voltage range	23.5 ... 28 VDC (adjustable)
Input voltage range	1 x 90 ... 264 VAC (Derating -1 %/V for voltage < 100 VAC)	Default Setting	DC 24 V
Nominal mains frequency range	50 Hz / 60 Hz	Nominal output current $I_{o\,nom}$	10 A (24 VDC)
Input current I_i	≤ 3.5 A	Nominal output power	240 W
Inrush current	≤ 15 A (at 230 VAC / 25 °C)	Deviation	≤ 1 %
Power factor correction (PFC)	Active	Residual ripple	≤ 100 mV (peak-to-peak)
Mains failure hold-up time	≥ 22 ms (230 VAC)	Overload behavior	Shutdown and automatic restart in the event of a short circuit

Signaling and communication	
Signaling	Optical status indication (DC OK)

Efficiency/power losses	
Power loss P _I	≤ 5 W (230 VAC; no load); ≤ 24.6 W (230 VAC; nominal load)
Efficiency (typ.)	91 %

Safety and protection	
Isolation voltage (pri.-sec., AC)	3510 V
Isolation voltage (pri.-PE, AC)	2210 V
Protection class	I
Protection type	IP20; per EN 60529
Overvoltage category	III (≤ 2000 m); II (> 2000 m)
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 1,000,000 h (at 25 °C; per IEC 61709; SN 29500)

Connection data	
Connection 1	
Connection type 1	Input/output
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 2624 Series
Solid conductor	0.2 ... 6 mm² / 24 ... 10 AWG
Fine-stranded conductor	0.2 ... 6 mm² / 24 ... 10 AWG
Fine-stranded conductor; with insulated ferrule	0.25 ... 2.5 mm²
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm²
Strip length	10 ... 12 mm / 0.39 ... 0.47 inches

Physical data	
Width	52 mm / 2.05 inches
Height	125 mm / 4.92 inches
Depth from upper-edge of DIN-rail	117 mm / 4.61 inches

Mechanical data	
Mounting type	DIN-35 rail

Material data	
Fire load	0 MJ
Weight	752 g



Environmental requirements	
Ambient temperature (operation)	-30 ... +70 °C (device starts at -40 °C (type-tested))
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-4.8 W/°C (> 45 °C and < 200 V); -4.8 W/°C (> 50 °C and ≥ 200 V)
Climatic category	3K3 (per EN 60721)
Operating altitude (max.)	5000 m

Standards and specifications	
Conformity marking	CE
Standards/specifications	EN 62368-1 EN 55032 EN 55035 EN IEC 61000-3-2 EN 61000-3-3 EN IEC 61000-6-4 EN IEC 61000-6-2 UL 61010-1 UL 61010-2-201

Commercial data	
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4066966626490
Customs tariff number	85044083900

Product classification	
UNSPSC	39121004

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
			Approval	Standard	Certificate Name
Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UL Underwriters Laboratories Inc.	UL 61010-2-201	E255817	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2587-2146

↓

Documentation

Bid Text

2587-2146

14.04.2025

docx

45.15 KB

↓

2587-2146

14.04.2025

x81

7.13 KB

↓

Instruction Leaflet

Power Supply BASE

V 3.0.0

10.09.2024

pdf

595.74 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models

2587-2146

↓