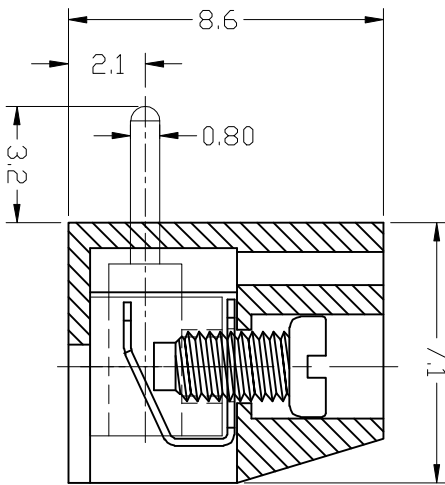
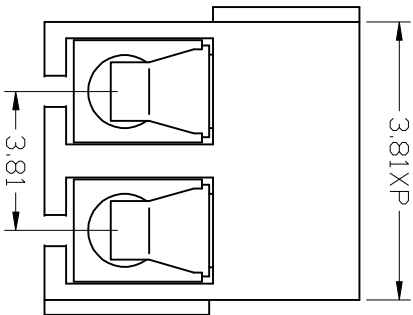


300V 7A 24-18AWG 1.0mm²
Poles: 2P, 3P-24P
Pitch: 3.81mm (.150")

Materials
Housing: PA66 (UL 94V-0)
Spring: Phosphor Bronze
Solder Pin: Brass, Tin Plated
Screw: M2, Steel (A3), Zinc Plated
Torque: 0.2N.m

 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD		设计/Designed by	绘图/Drawn by	审核/Checked by	批准/Approved by	备注/Remark	
XY340R		图名/Title	文件编号/Title No.		公差/Tolerance		
		页序/Sheet					
		.x ±0.2 .x" ±2° .x ±0.1 .x" ±1° .xx ±0.05 .xx" ±0.5" .xxx ±0.01		单位/unit is: mm			