
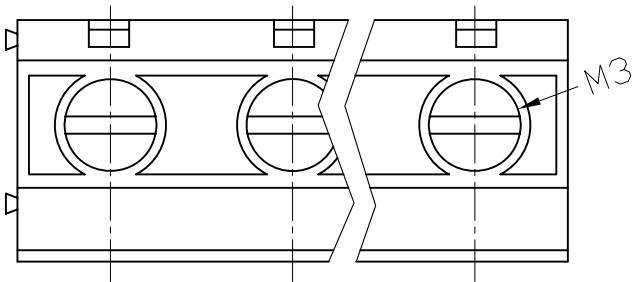
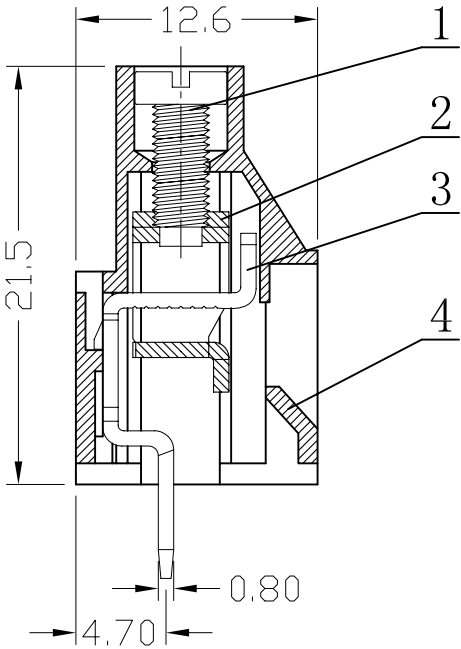


| 序号/RevNo. | 名称/Title  | 文件编号/File No.  |
|-----------|-----------|----------------|
| 1         | XY130 螺丝  | QJ/XYT-2142101 |
| 2         | XY130 铁方块 | QJ/XYT-2142102 |
| 3         | XY130 端子  | QJ/XYT-2142103 |
| 4         | XY130 塑件  | QJ/XYT-2142104 |

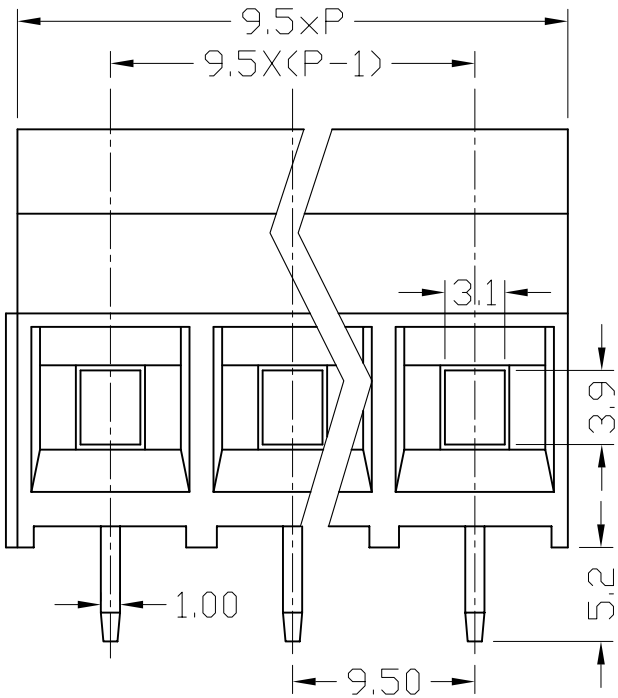

300V 30A 26-10AWG 4.0mm<sup>2</sup>  
Poles: 2P&3P-24P  
Pitch: 9.5mm(.375")

Materials  
Housing: PA66(UL 94V-0)  
Solder Pin: Brass,Tin Plated  
Wire Cage: Steel A3,Nickel Plated  
Screw: M3,Steel(A3),Zinc Plated  
Torque: 0.5N.m

| 设计/Designed by                                                               | 绘图/Drawing by | 审核/Checked by | 批准/Approved by | 未注公差<br>General Tolerance |       |      |       |
|------------------------------------------------------------------------------|---------------|---------------|----------------|---------------------------|-------|------|-------|
| <div><div></div><div>新莱亚电子</div><div>XINLAIYA ELECTRONIC CO.,LTD</div></div> |               |               |                | x.                        | ±0.2  | x."  | ±2°   |
|                                                                              |               |               |                | .x                        | ±0.1  | .x"  | ±1°   |
|                                                                              |               |               |                | .xx                       | ±0.05 | .xx" | ±0.5° |
|                                                                              |               |               |                | .xxx                      | ±0.01 |      |       |
|                                                                              |               |               |                | 单位/Units: mm              |       |      |       |

| 序号/RevNo. | 更改记录/Revision note | 签名/Signature | 日期/Date |
|-----------|--------------------|--------------|---------|
|-----------|--------------------|--------------|---------|