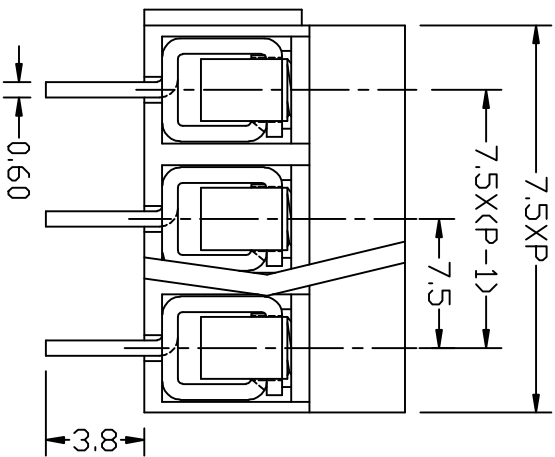


300V 10A 26-14AWG 2.5mm²
Poles: 2P&3P-24P
Pitch: 7.5mm(.295")

Materials
Housing: PA66(UL 94V-0)
Wire Protector: Stainless Steel
Solder Pin: Brass, Tin Plated
Screw: M2.5, Steel(A3), Zinc Plated
Torque: 0.4N.m