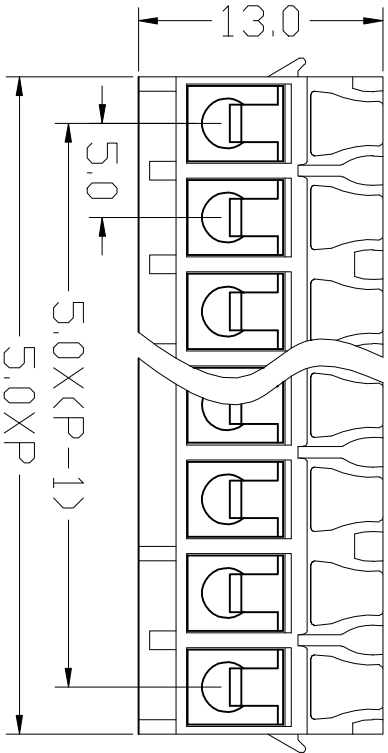


300V 10A 28-14AWG 1.5mm²
Poles: (2P, 3P-24P)
Pitch: 5.0mm (.197")

Materials
Housing: PA66 (UL 94V-0)
Wire Cage: Brass, Tin Plated
Clamping: Phosphor Bronze
Screw: M2.6, Steel (A3), Zinc Plated
Torque: 0.4N.m

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		备注/Remark		单位/Units: mm	
图名/File name		文件编号/File No.		页序/Sheet		公差		公差		公差	
XY334-5.0						X. ±0.2		X. ±2°			
						.X ±0.1		.X ±1°			
						.XX ±0.05		.XX ±0.5°			
						.XXX ±0.01					

序号/Rev.No.

更改记录/Revision note

签名/Signature

日期/Date

X

新莱亚电子

XINLAIYA ELECTRONIC CO., LTD

XY334-5.0

备注/Remark